



## TECHNICAL SPECIFICATIONS



**Dimensions:** 55 - 57cm seat centres  
50,5 cm depth  
95 cm height

**Backrest:** Cold moulded polyurethane foam 'UNIBLOCK' system, which wraps an injected polypropylene frame completely. All this structure is protected by a texturized injected polypropylene seat shell. Polyurethane density 55 Kg/m<sup>3</sup>.

**Seat:** Cold moulded polyurethane foam 'UNIBLOCK' system, which wraps an injected polypropylene frame completely. All this structure is protected by a texturized injected polypropylene seat shell. The seat pan folds by means of an automatic noiseless maintenance-free double spring. Polyurethane density 65 Kg/m<sup>3</sup>.

**Side panel:** Texturized injected polypropylene, 70mm. End row panels completely upholstered. Optional by LYF System or wood. Concealed floor fixation system.


**Armrest:** Texturized injected polypropylene. Optional by LYF System or wood.

**Volume:** 0.160 m<sup>3</sup>/unit

**Weight:** 18.80 Kg

# ARGENTINA PLUS

## DRAWING

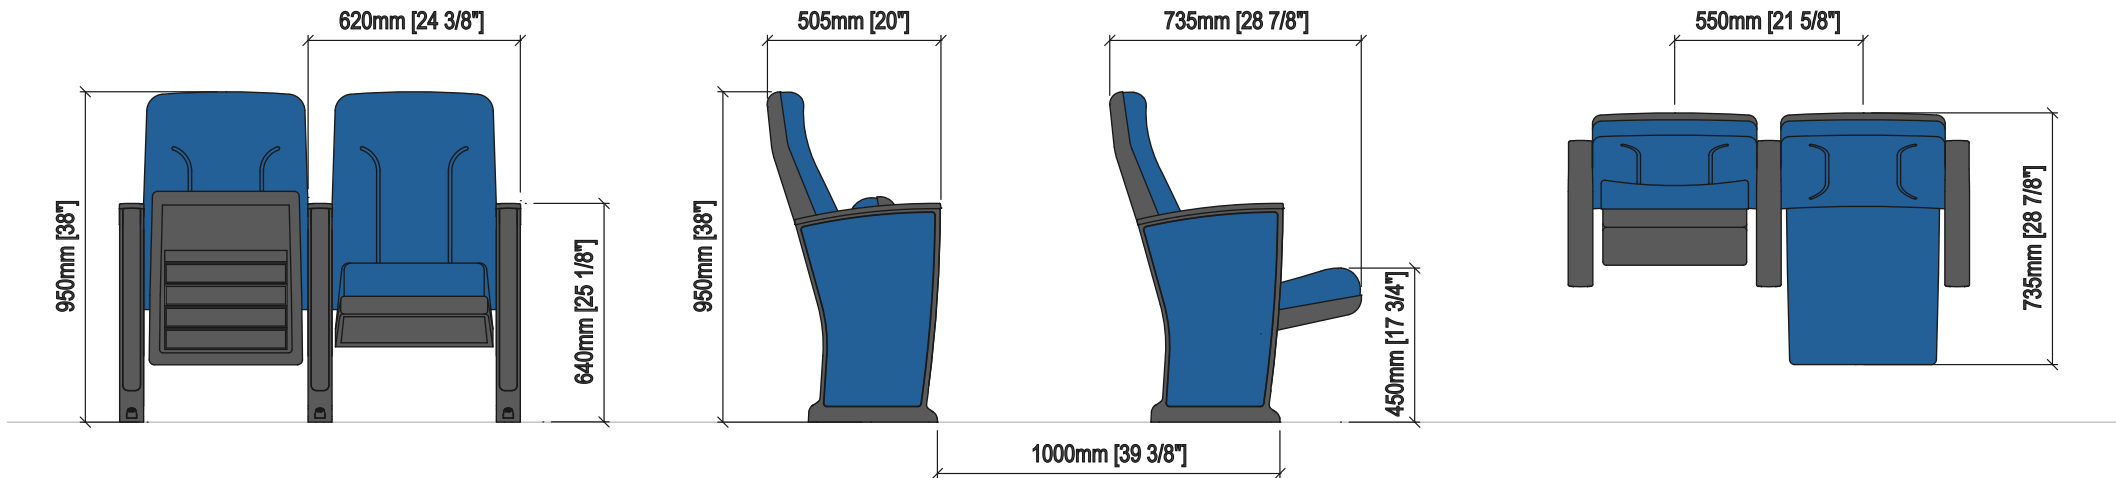

## OPTIONS



## CERTIFICATES

BS 5852:2006  
BS-EN 1021-1:2006  
CAL TB 117-2013, SECTION 1  
UNE 23.727-90 IR (M1)  
UNE-EN 1021-1:2006 / UNE-EN 1021-2:2006  
BS 5852:1979 Parte 1

	Fabric	Fire barrier	Foam	Seat
BS 5852:2006	•			
BS-EN 1021-1:2006	•			
CAL TB 117-2013, SECTION 1	•			
UNE 23.727-90 IR (M1)	•	•		
UNE-EN 1021-1:2006 / UNE-EN 1021-2:2006	•	•	•	•
BS 5852:1979 Parte 1		•		



Euro Seating reserves the right to modify the dimensions and characteristics without prior notice. All dimensions and specifications are given for information purposes only.