

ATENAS PLUS



TECHNICAL SPECIFICATIONS

Dimensions: 55 - 57 cm seat centres

50,5 cm depth 95 cm height

Backrest: Cold moulded polyurethane foam 'UNIBLOCK'

system, which wraps an injected polypropylene frame completely. All this structure is protected by a texturized injected polypropylene seat shell.

Polyurethane density 55 Kg/m³.

Seat: Cold moulded polyurethane foam 'UNIBLOCK'

system, which wraps an injected polypropylene frame completely. All this structure is protected by a texturized injected polypropylene seat shell. The seat pan folds by means of an automatic

noiseless maintenance-free double spring.

Polyurethane density 65 Kg/m³

Side panel: Texturized injected polypropylene, 70mm. End row

panels completely upholstered. Optional by LYF System or wood. Concelaed floor fixation system.

Armrest: Texturized injected polypropylene. Optional by LYF

System or wood.


Volume: 0.13 m³ por unidad

Weight: 15.80 Kg not assembled

Euro Seating reserves the right to modify the dimensions and characteristics without prior notice. All dimensions and specifications are given for information purposes only.



ATENAS PLUS

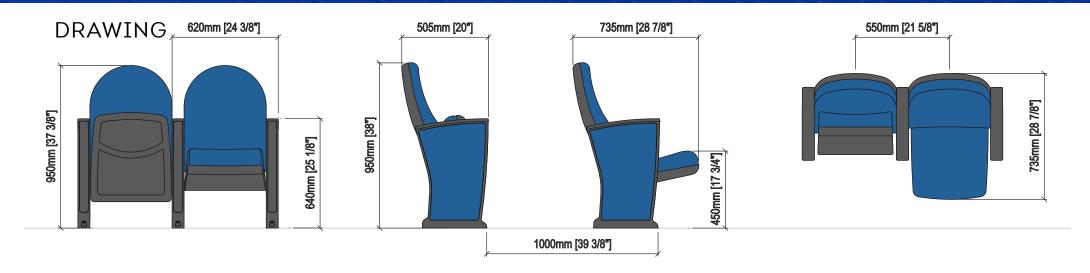

OPTIONS



Fixation to the floor



Embroidered logo



Slope



Row labels







Ref 975 (more upright backrest)



Seating numbering



Tip-up seat

CERTIFICATES

BS 5852:2006
BS-EN 1021-1:2006
CAL TB 117-2013, SECTION 1
UNE 23.727-90 1R (M1)
UNE-EN 1021-1:2006 / UNE-EN 1021-2:2006
BS 5852:1979 Parte 1

•	
•	
•	
•	
•	

Fabrics











Fire barrier Foam



Seat

Euro Seating reserves the right to modify the dimensions and characteristics without prior notice. All dimensions and specifications are given for information purposes only.

Desk