




## TECHNICAL SPECIFICATIONS


- Dimensions:** 59 - 61 cm seat centres  
60 cm depth  
111 cm height
- Backrest:** Cold moulded polyurethane foam 'UNIBLOCK' system, which wraps an injected polypropylene frame completely. All this structure is protected by a texturized injected polypropylene seat shell. Polyurethane density 55 Kg/m<sup>3</sup>.
- Seat:** Cold moulded polyurethane foam 'UNIBLOCK' system, which wraps an injected polypropylene frame completely. All this structure is protected by a texturized injected polypropylene seat shell. The seat pan folds by means of an automatic noiseless maintenance-free double spring. Polyurethane density 65 Kg/m<sup>3</sup>.
- Side panel:** Texturized injected polypropylene, 70mm. Antipanic polystyrene writing pad system with interior steel structure, located in the interior of the side panel. End row panels completely upholstered. Concealed floor fixation system.
- Armrest:** Rectangular texturized injected polypropylene,
- Volume:** 0.150 m<sup>3</sup>/unit
- Weight:** 21,20 Kg not assembled

Euro Seating reserves the right to modify the dimensions and characteristics without prior notice. All dimensions and specifications are given for information purposes only.

## DRAWING

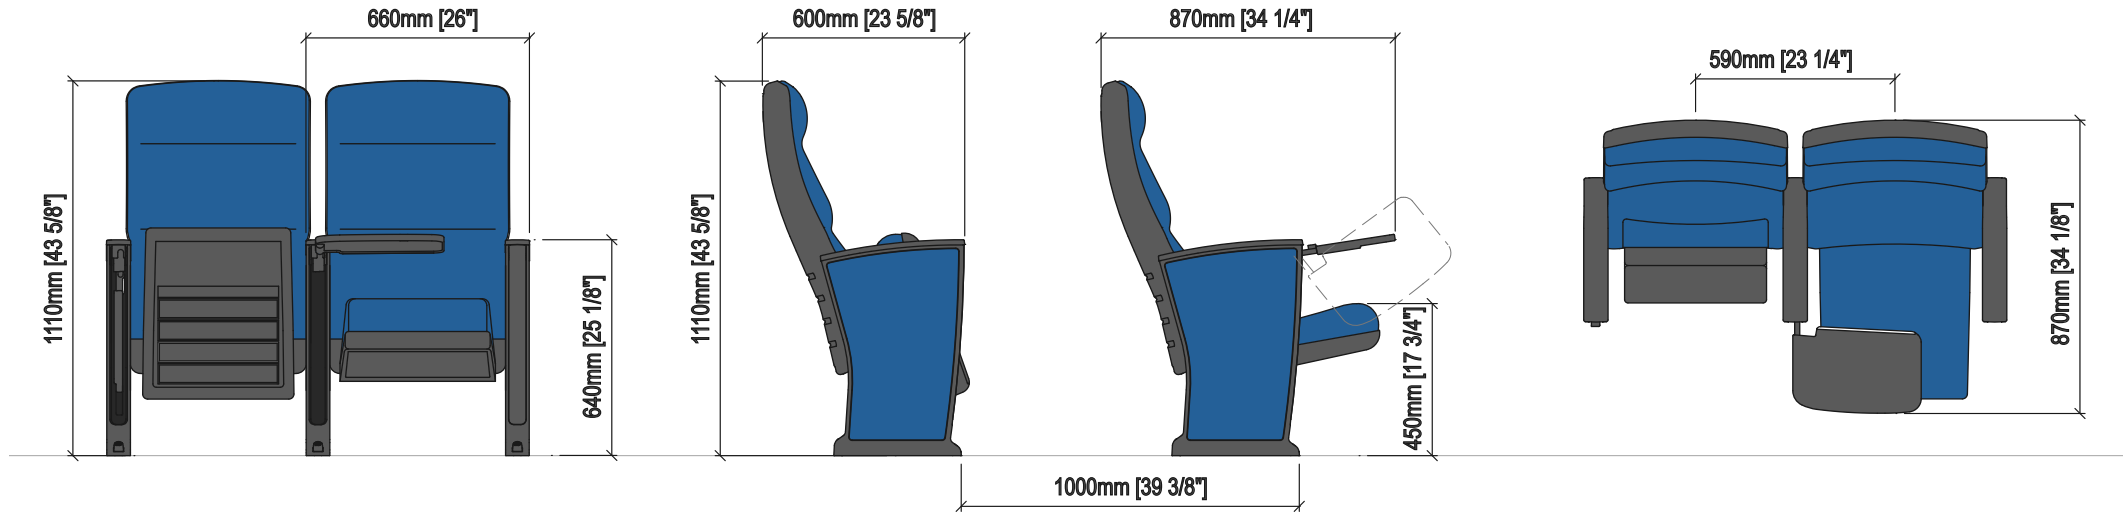

## OPTIONS

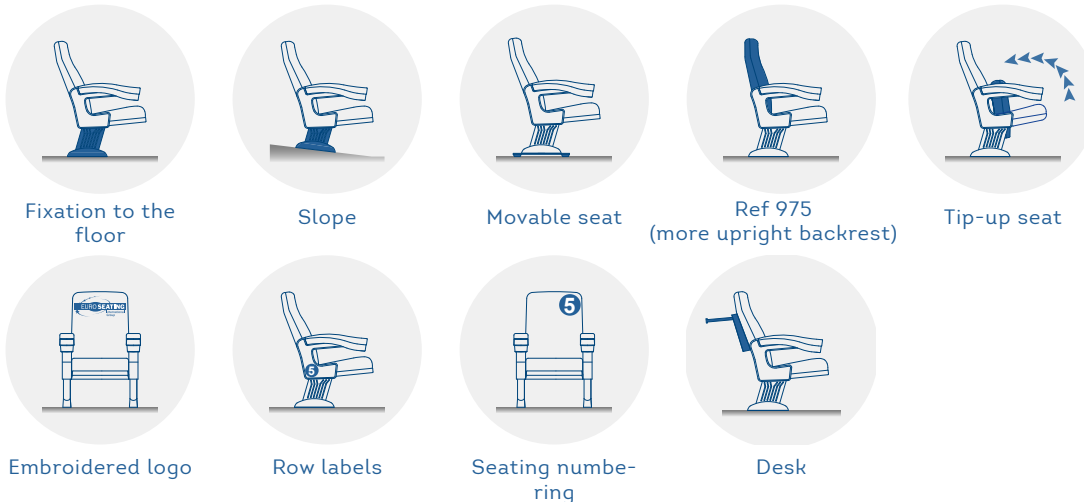

## CERTIFICATES

BS 5852:2006  
BS-EN 1021-1:2006  
CAL TB 117-2013, SECTION 1  
UNE 23.727-90 IR (M1)  
UNE-EN 1021-1:2006 / UNE-EN 1021-2:2006  
BS 5852:1979 Parte 1

Fabric	Fire barrier	Foam	Seat
•			
•			
•			
•	•		
•	•	•	•
	•		



Euro Seating reserves the right to modify the dimensions and characteristics without prior notice. All dimensions and specifications are given for information purposes only.