




TECHNICAL SPECIFICATIONS


- Dimensions:** 55 - 57 cm seat centres
52 cm depth
100 cm height
- Backrest:** Cold moulded polyurethane foam 'UNIBLOCK' system, which wraps an injected polypropylene frame completely. All this structure is protected by a texturized injected polypropylene seat shell. Polyurethane density 55 Kg/m³.
- Seat:** Cold moulded polyurethane foam 'UNIBLOCK 2' system, which wraps an injected polypropylene frame completely. All this structure is protected by a texturized injected polypropylene seat shell. The seat pan folds by means of an automatic noiseless maintenance-free double spring. Polyurethane density 65 Kg/m³.
- Side panel:** Texturized injected polypropylene, 70mm. End row panels completely upholstered. Optional by laminated 3D finish with LYF system or by wood. Concelaed floor fixation system.
- Armrest:** Rectangular texturized injected polypropylene, Optional; by LYF System or wood.
- Volume:** 0.150 m³/unit
- Weight:** 14.5 Kg not assembled

MONTREAL PLUS

DRAWING

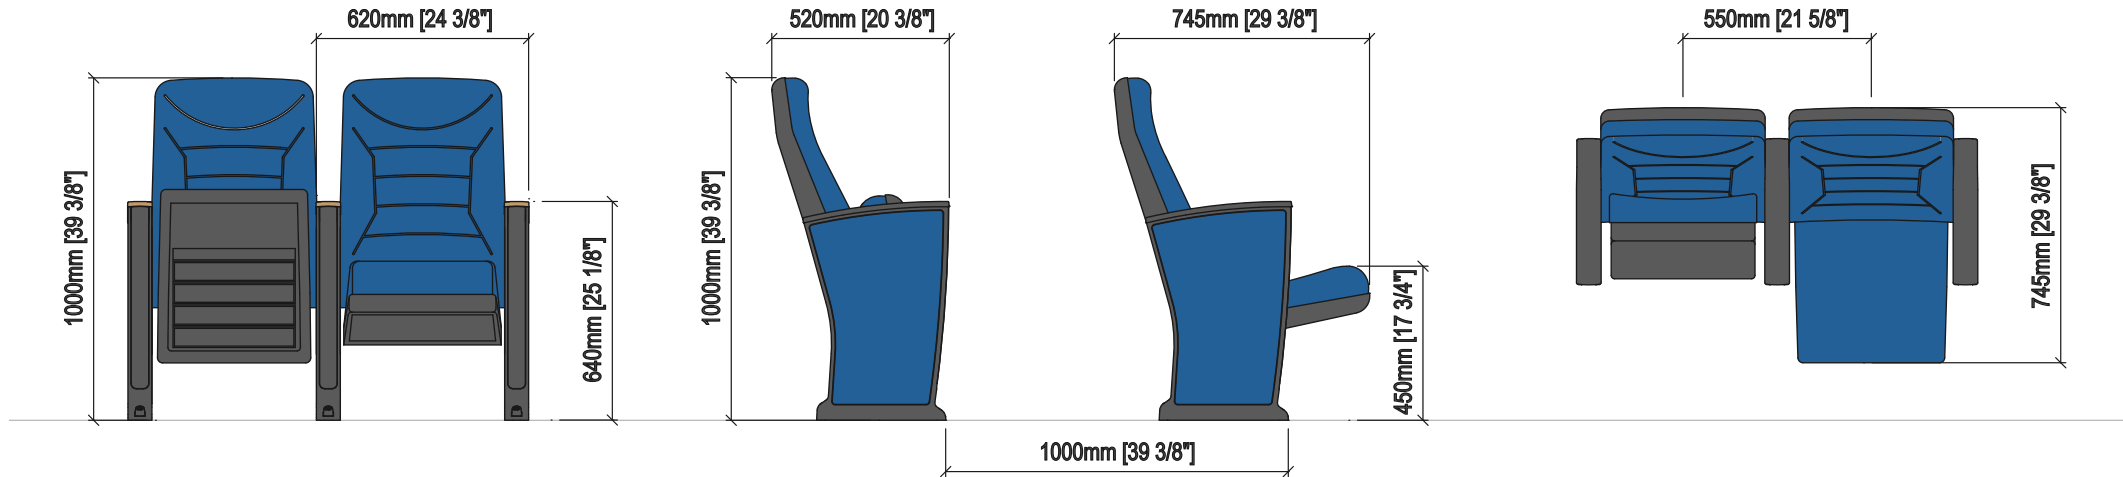

OPTIONS

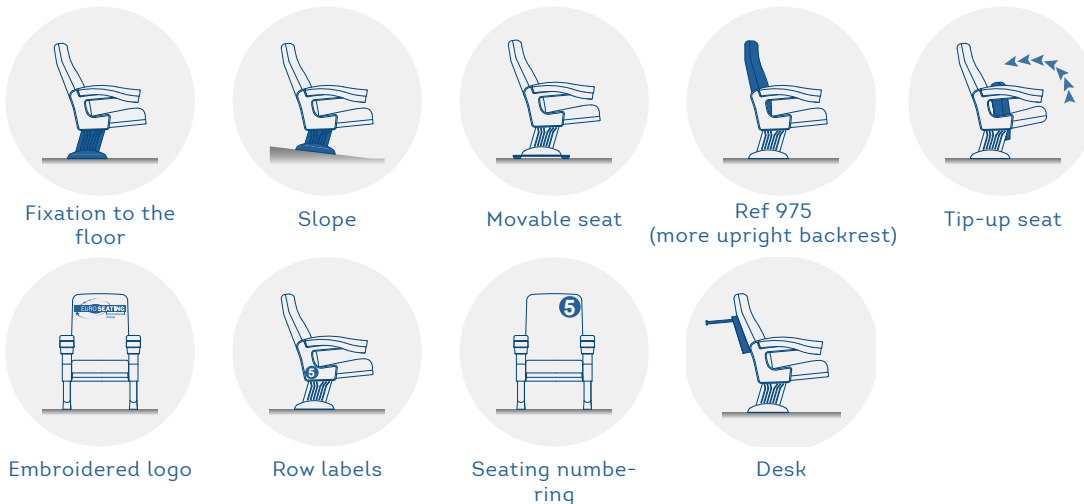

CERTIFICATES

BS 5852:2006
BS-EN 1021-1:2006
CAL TB 117-2013, SECTION 1
UNE 23.727-90 IR (M1)
UNE-EN 1021-1:2006 / UNE-EN 1021-2:2006
BS 5852:1979 Parte 1

Fabric	Fire barrier	Foam	Seat
•			
•			
•			
•	•		
•	•	•	•
	•		



Euro Seating reserves the right to modify the dimensions and characteristics without prior notice. All dimensions and specifications are given for information purposes only.