

TECHNICAL SPECIFICATIONS



Dimensions: 55 - 57 cm seat centres
52 cm depth
95 cm height

Backrest: Cold moulded polyurethane foam, which wraps an injected polypropylene frame completely. It is later upholstered by means of a fabric cover, everything is protected by laminated 3D finish with LYF system or by wood. Polyurethane density 55 Kg/m³.

Seat: Cold moulded polyurethane foam, which wraps an injected polypropylene frame completely. It is later upholstered by means of a fabric cover. The seat pan folds by means of an automatic noiseless maintenance-free double spring. Polyurethane density 65 Kg/m³.

Side panel: Texturized injected polypropylene, 70mm. End row panels completely upholstered. Optional by LYF system or wood. Concealed floor fixation system.


Armrest: Rectangular texturized injected polypropylene by laminated 3D finish with LYF system. Optional by injected polypropylene or wood.

Volume: 0.15 m³

Weight: 19.50 Kg not assembled

MOZART PLUS PL

DRAWING

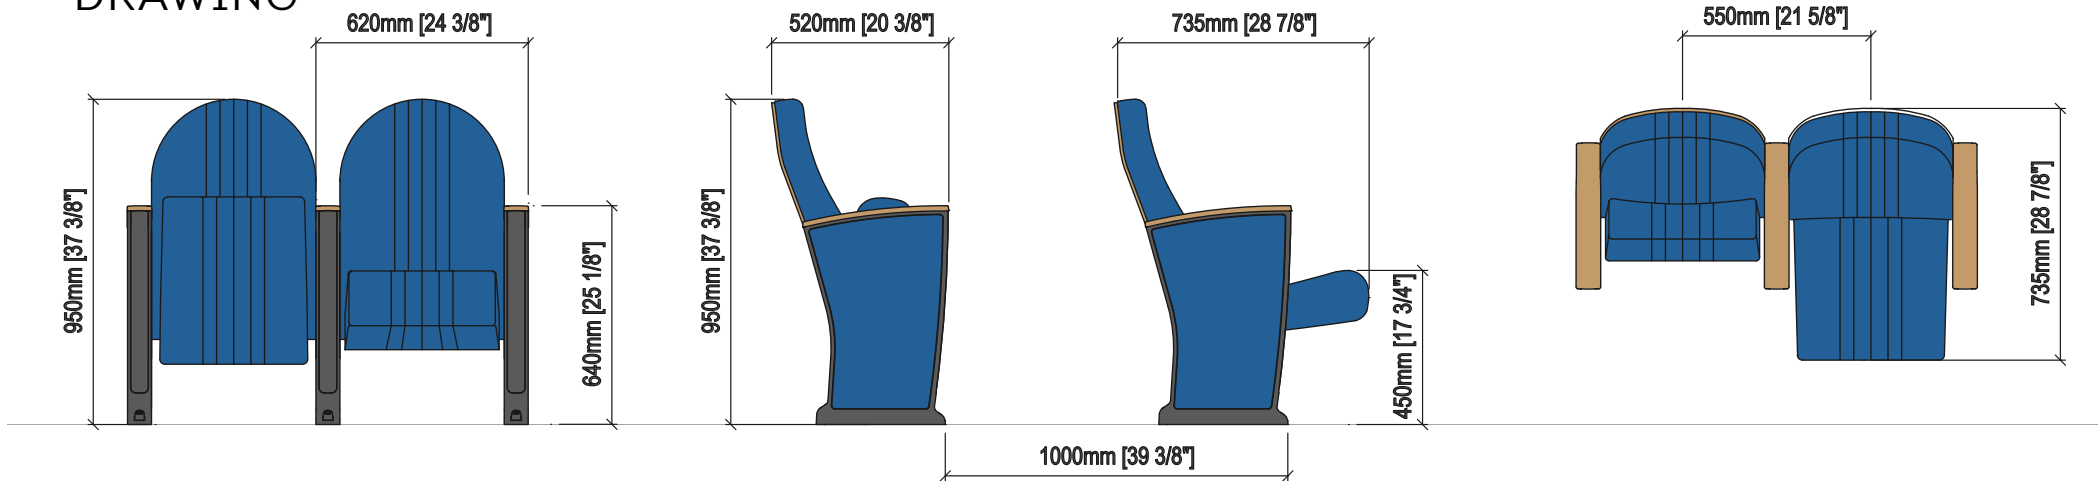

OPTIONS



CERTIFICATES

BS 5852:2006
BS-EN 1021-1:2006
CAL TB 117-2013, SECTION 1
UNE 23.727-90 IR (M1)
UNE-EN 1021-1:2006 / UNE-EN 1021-2:2006
BS 5852:1979 Parte 1

Fabrics	Fire barrier	Foam	Seat
•			
•			
•			
•	•		
•	•	•	•
	•		



Euro Seating reserves the right to modify the dimensions and characteristics without prior notice. All dimensions and specifications are given for information purposes only.