




TECHNICAL SPECIFICATIONS

- Dimensions:** 55 - 57 cm seat centres
52.5 cm depth
95 cm height
- Backrest:** Cold moulded polyurethane foam, which wraps an injected polypropylene frame completely. It is later upholstered by means of a fabric cover, everything is protected by a compressed wood cover. Polyurethane density 55 Kg/m³.
- Seat:** Cold moulded polyurethane foam, which wraps an injected polypropylene frame completely. It is later upholstered by means of a fabric cover. The seat pan folds by means of an automatic noiseless maintenance-free double spring. Polyurethane density 65 Kg/m³.
- Side panel:** Texturized injected polypropylene, 70mm. End row panels by laminated 3D finish with LYF system. Optional end row panels fully upholstered or by wood. Concealed floor fixation system.
- Armrest:** Rectangular texturized injected polypropylene, finished by LYF System. Optional in polypropylene or by wood.
- Volume:** 0.150 m³/unit
- Weight:** 19.7 Kg not assembled

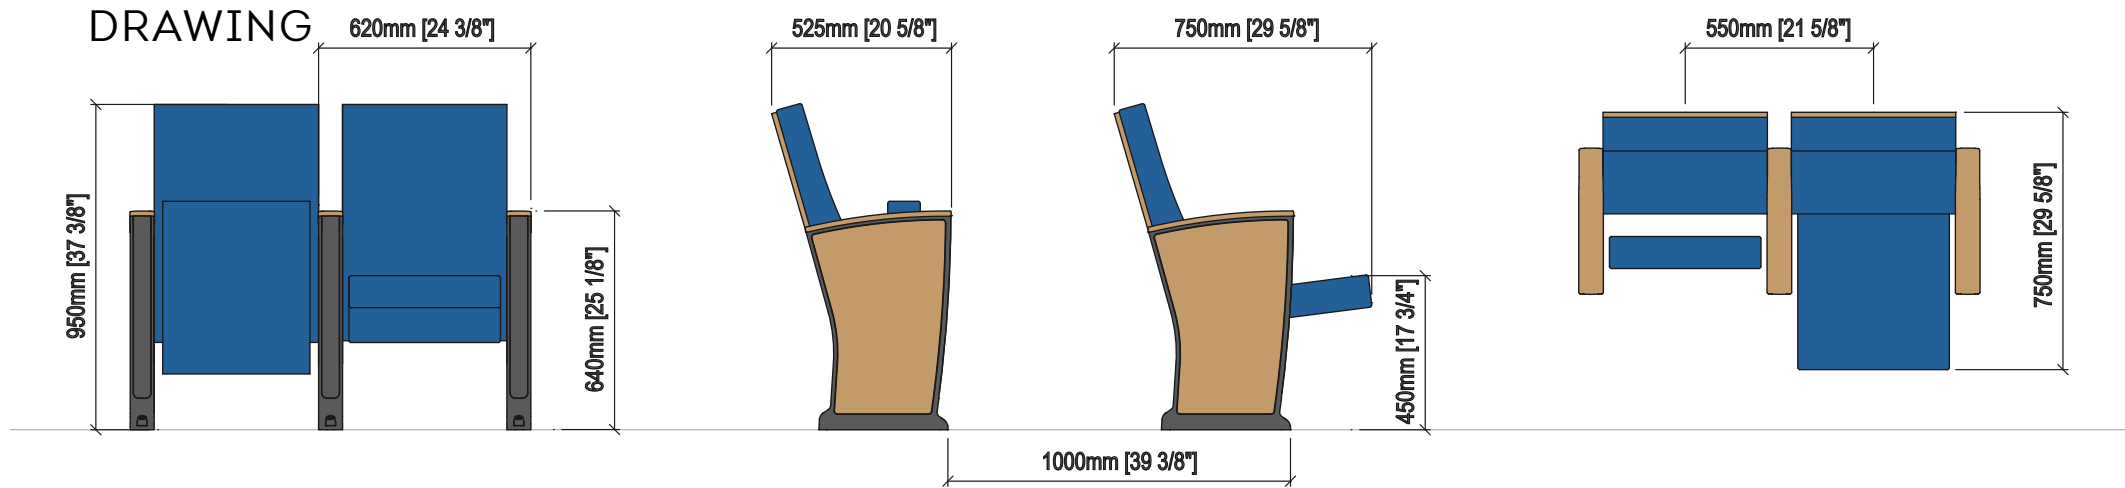

OPTIONS



CERTIFICATES

BS 5852:2006
 BS-EN 1021-1:2006
 CAL TB 117-2013, SECTION 1
 UNE 23.727-90 IR (M1)
 UNE-EN 1021-1:2006 / UNE-EN 1021-2:2006
 BS 5852:1979 Parte 1

	Fabric	Fire barrier	Foam	Seat
BS 5852:2006	•			
BS-EN 1021-1:2006	•			
CAL TB 117-2013, SECTION 1	•			
UNE 23.727-90 IR (M1)	•	•		
UNE-EN 1021-1:2006 / UNE-EN 1021-2:2006	•	•	•	•
BS 5852:1979 Parte 1		•		



Euro Seating reserves the right to modify the dimensions and characteristics without prior notice. All dimensions and specifications are given for information purposes only.