



TECHNICAL SPECIFICATIONS

Dimensions: 55 - 57 cm seat centres
52 cm depth
95 cm height

Backrest: Cold moulded polyurethane foam, which wraps an injected polypropylene frame completely. It is later upholstered by means of a fabric cover, everything is protected by laminated 3D finish with LYF system. Polyurethane density 55 Kg/m³.

Seat: Cold moulded polyurethane foam, which wraps an injected polypropylene frame completely. It is later upholstered by means of a fabric cover. The seat pan folds by means of an automatic noiseless maintenance-free double spring. Polyurethane density 65 Kg/m³.

Side panel: Texturized injected polypropylene, 70mm. Anti - panic polystyrene writing pad system with interior steel structure, located in the interior of the side panel. End row panels completely upholstered. Optional by LYF system or wood. Concealed floor fixation system.

Armrest: Rectangular texturized injected polypropylene by laminated 3D finish with LYF system. Optional by injected polypropylene or wood.


Volume: 0.15 m³

Weight: 17.50 Kg not assembled



OTELO PLUS PL

DRAWING

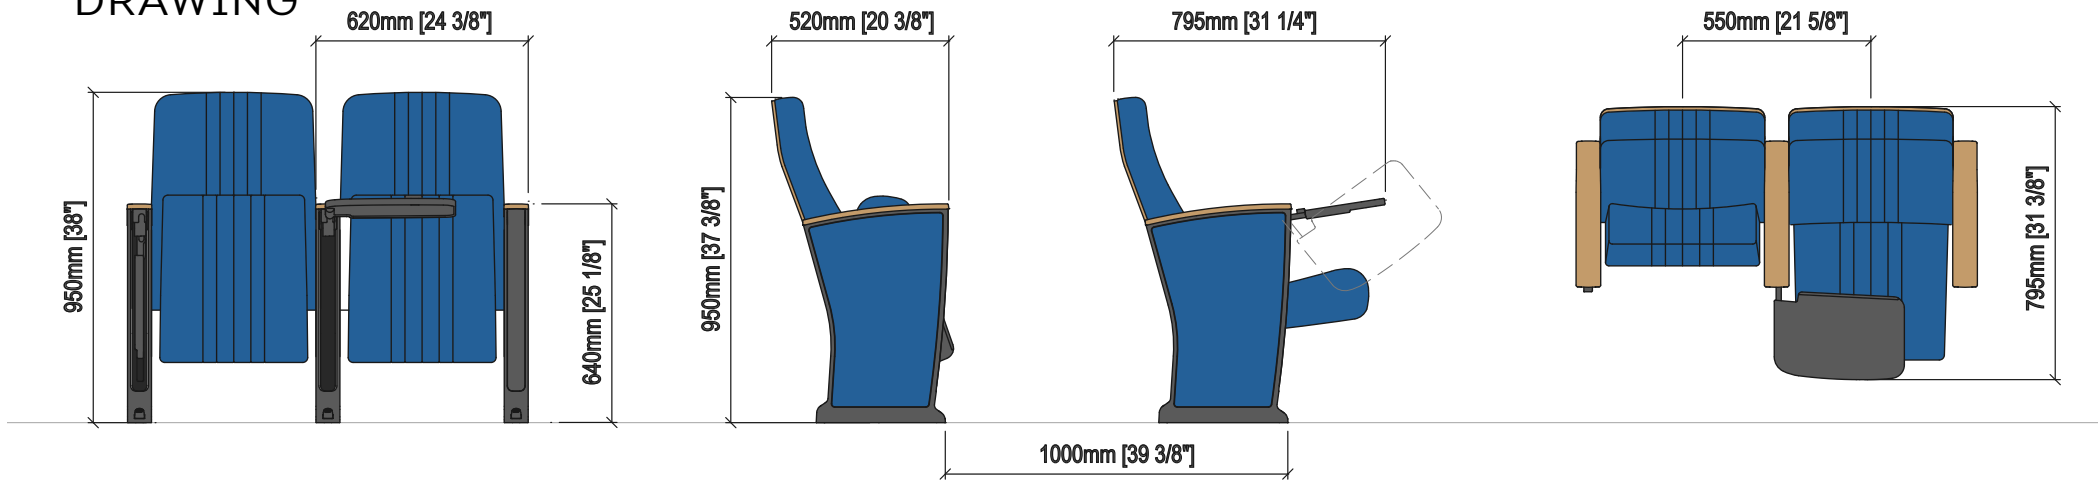

OPTIONS



CERTIFICATES

BS 5852:2006
BS-EN 1021-1:2006
CAL TB 117-2013, SECTION 1
UNE 23.727-90 IR (M1)
UNE-EN 1021-1:2006 / UNE-EN 1021-2:2006
BS 5852:1979 Parte 1

Fabrics	Fire barrier	Foam	Seat
•			
•			
•			
•	•		
•	•	•	•
	•		



Euro Seating reserves the right to modify the dimensions and characteristics without prior notice. All dimensions and specifications are given for information purposes only.